BOYA NIKO 4000 L

Cod. 70010024

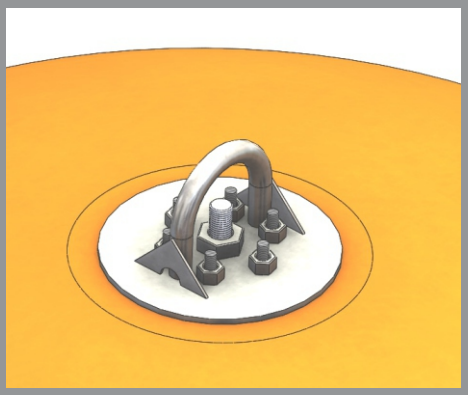

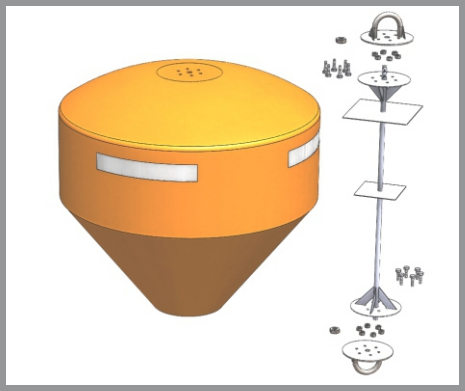

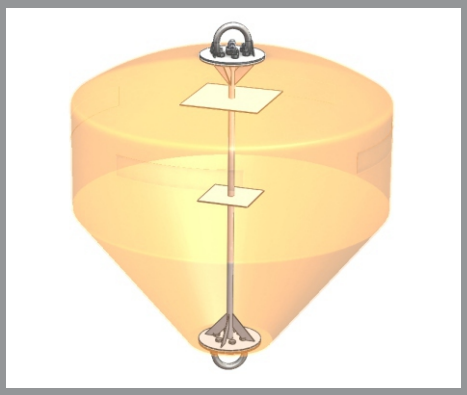

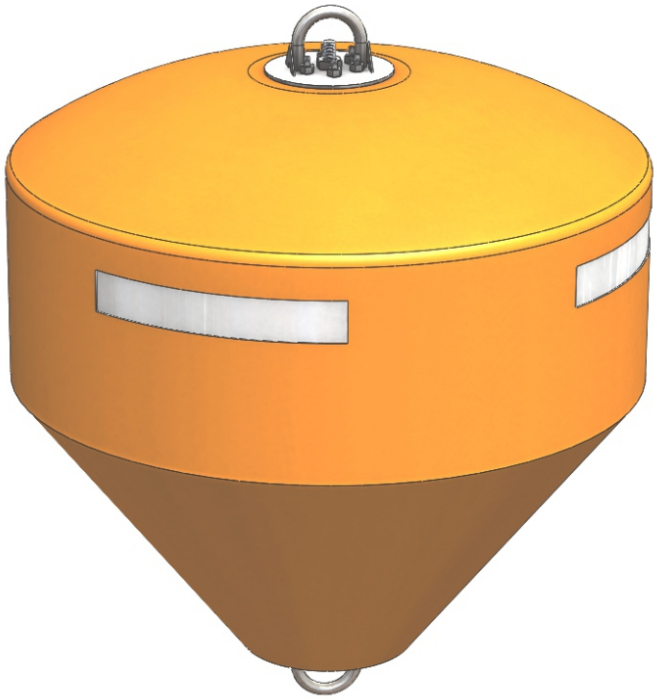

Especificación Técnica

Volumen:
4000 litros
Cuerpo:
- polietileno rotomoldeado
-fabricado en mediana densidad (MDPE)
-Color: naranjo
-espesor promedio en 8 mm
-estabilizado con aditivo anti UV
Flotabilidad:
-poliestireno expandido(EPS 15 Kg/m3 densidad)
Inserto:
-a partir de barra acero redondo macizo de1 1/2 pulgada , plato central y de extremos en espesor de 5 mm .
cancamos:
- barra de acero redondo macizo curvado de 1 1/2 pulgada , plato en 10 mm espesor
características especiales
- Cinta reflectora 3m (4 áreas perímetro)

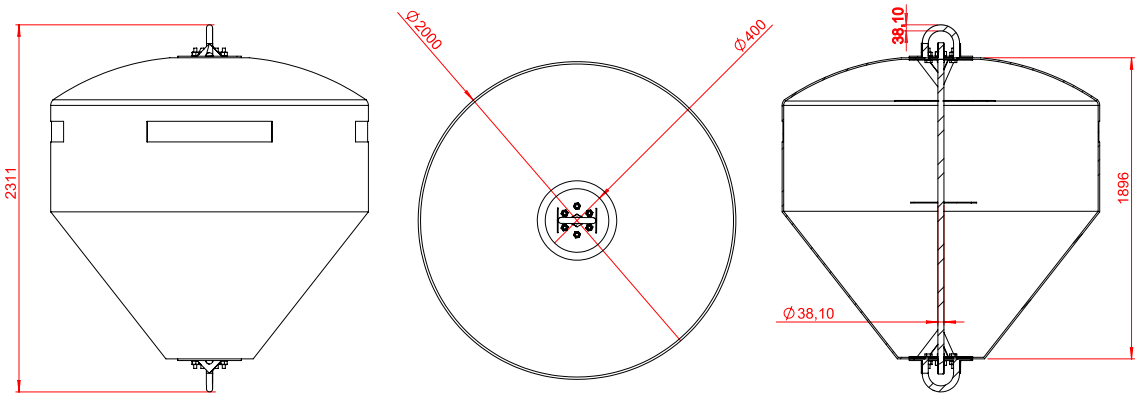

the Niko Buoys are products certificated by Noomas Certification Ltd.

Noomas Certifisering is authorised by Norwegian Accreditation to certify products within the requirements in NS 9415.through the authorisation from Norwegian Accreditation (PROD 013) we are empowered to make sure that cartified products through the companies " 92 routines are in accordance with the requirements.

MEMBER

NORSK AKKREDITERING PRO 013 INSP 006

NOOMAS SERTIFISERING

ISO 9001 REGISTERED
DNV
MGMT. SYS. RvA C 024
DNV Certification B.V., The Netherlands

AUSTRAL PLASTICS Chile S.A.
Longitudinal Sur KM.1029 Alto Bonito / Parcela 22
Puerto Montt / Chile
Fono:(56-65) 2560 700 / 560 701
www.australplastics.com

4 LDPE